


Oil-injected screw compressor stage

EU 160 Series

Air end data



power consumption at driving shaft recommended [kW]	160
volume flow max [m ³ /min]	32.1
discharge pressure max. [bar a]	16
male rotor speed max. [rpm]	2,900
lobe combination	5/6

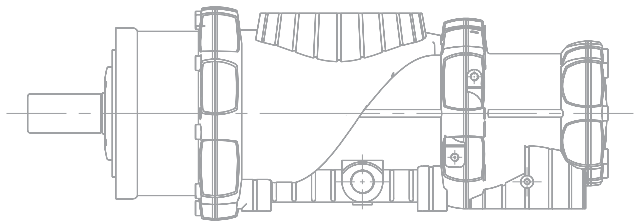

EU 160 Series

Performance data

Performance statements according to ISO 1217

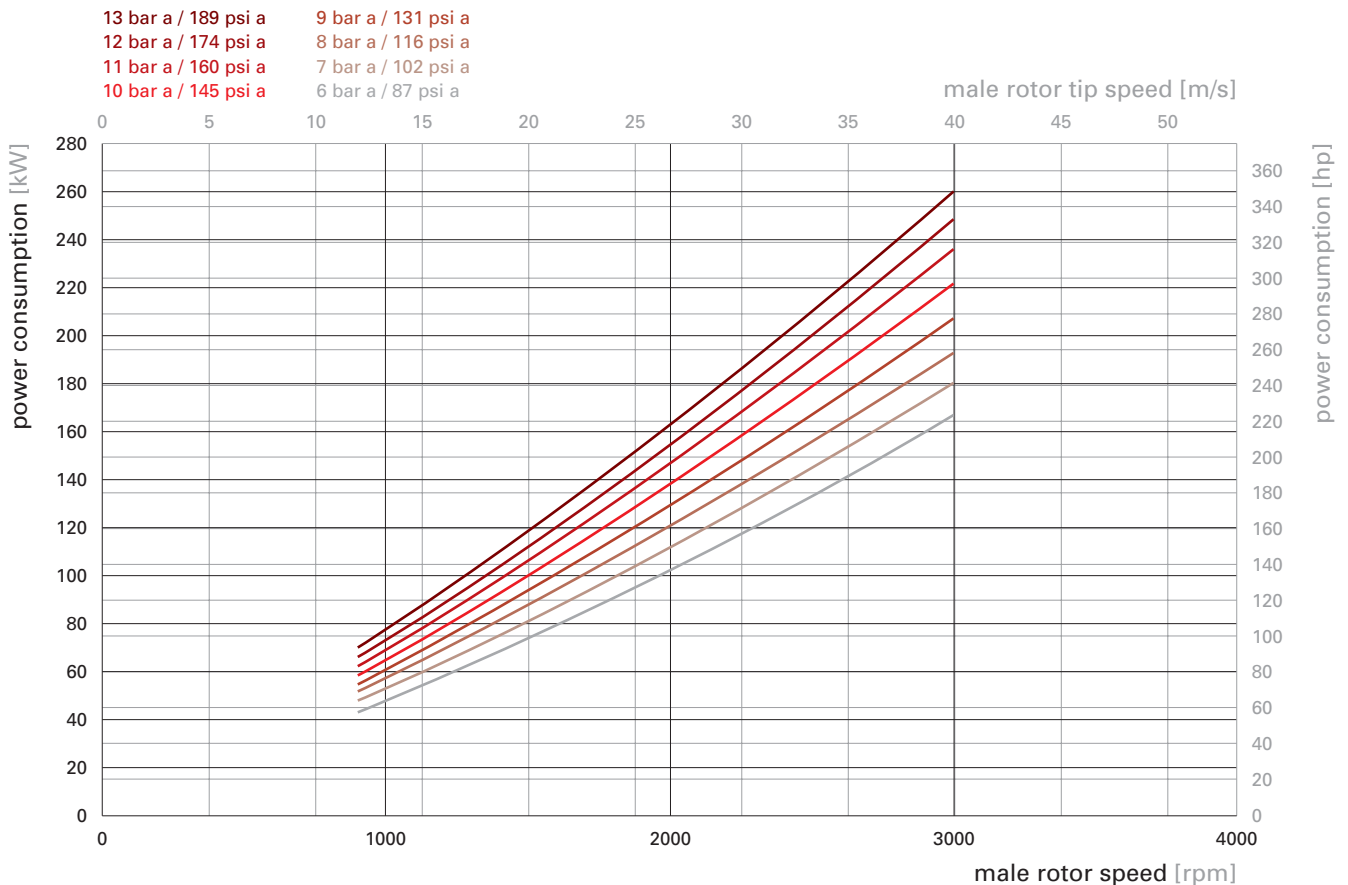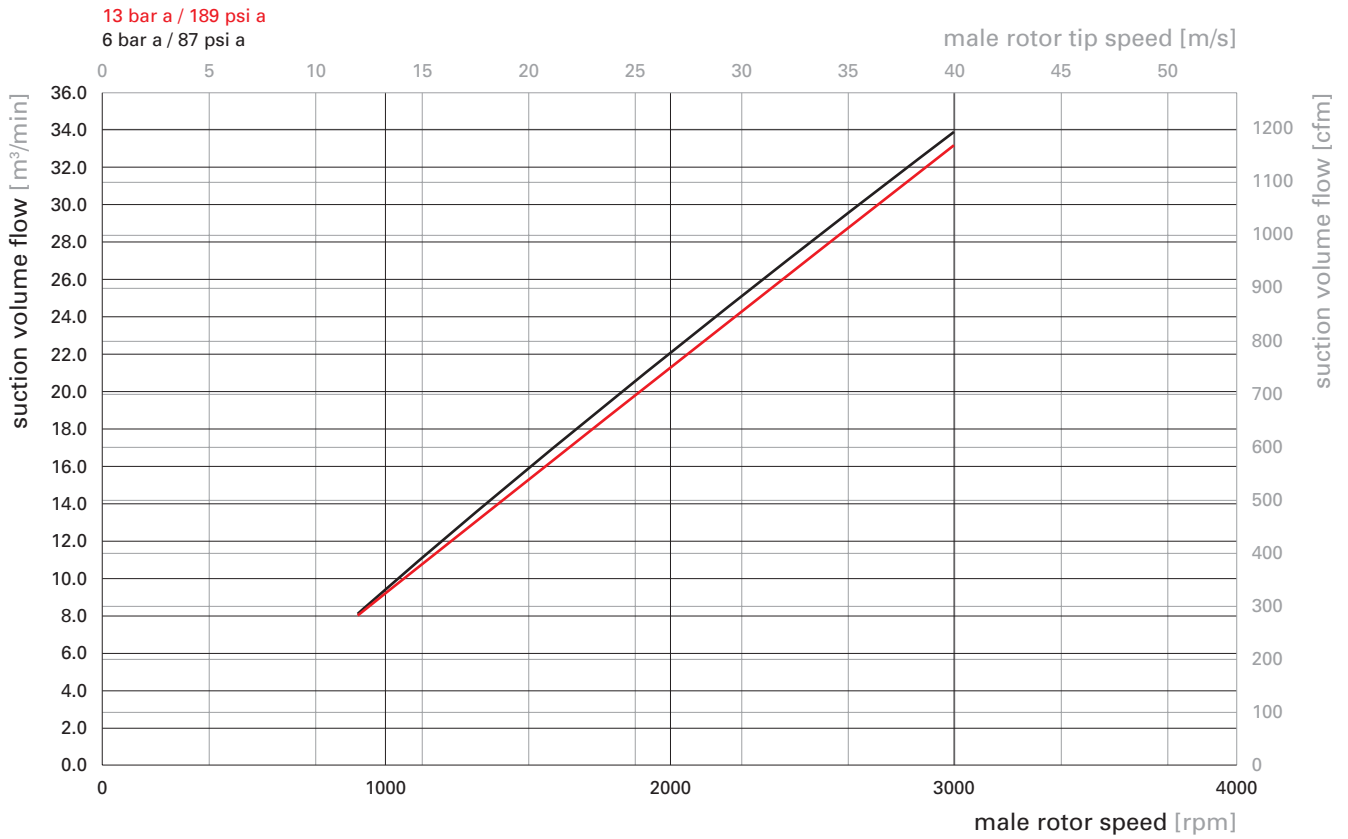

EU 160 GH

Installation drawing [mm]

weight [kg]

664

